



# **Also Bought Products Documentation**

Module Version: 1.0000

Last Updated: 04/24/2021

# Table of Contents


Overview	1
Setup	2
Requirements	2
Installation	2
Setting Up The pdsalsobought Item	3
Also Bought Products Batch List	4
Technical Set-up	5
Item Template	7
JSON API	8
AlsoBoughtProductsList_Load_Query	9
Request Parameters	9
On Demand Columns	10
Search Filter Columns	11
Sort Filter Columns	11
Example Request	12
Example Response	12
AlsoBoughtProduct_Update_Assigned	13
Request Parameters	13
Example Request	14
Example Response	14
AlsoBoughtProducts_ProcessOrders	15
Request Parameters	15
Example Request	15
Example Response	15
XML Provisioning	16
Uninstalling the Module	17

## Overview

This module keeps a running count of products purchased together and provides a template layer to display the results at a product level. Each time an order is placed by a customer containing more than one item, all items in the order are added to each other's also bought count, incrementing the count by one for each item. The also bought counts are tracked at the master product level. Items deleted from orders will decrement the also bought count for the deleted items by one on the remaining items.

New orders and/or order items added to existing orders in the admin or remotely via JSON API must use the **Order Fulfillment Modules** trigger to process the order and update the also bought products count.

1. Navigate to **Order Processing > Orders** in the Miva admin and edit an order to be processed.
2. Click **Order Fulfillment Modules** in the edit links section.
3. Check the **Process** checkbox for the **Also Bought Products** module.
4. Click the **Process** button to process the order.

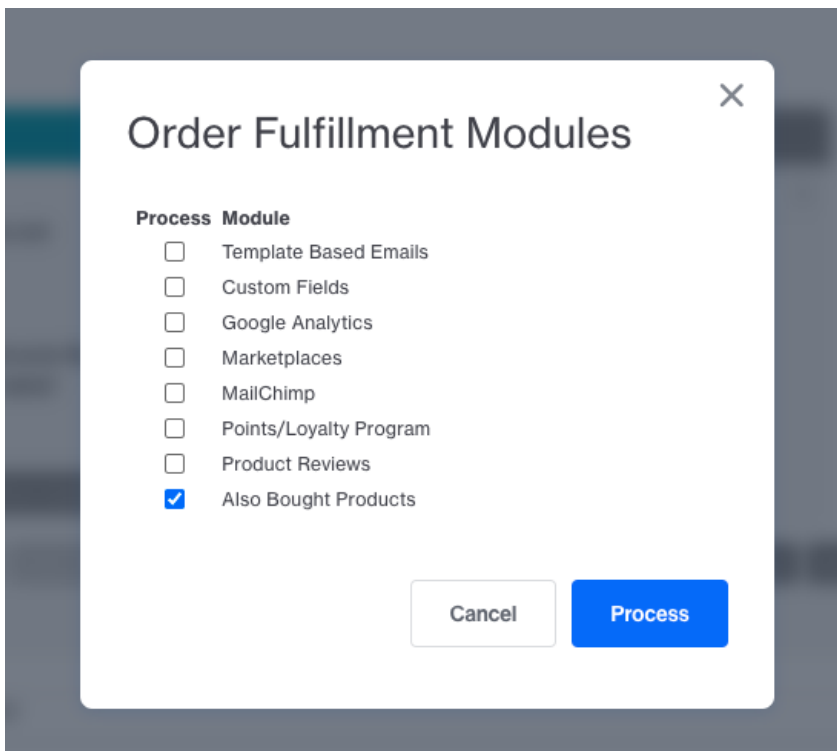

# Setup


## Requirements

Miva Merchant: **10.00.00**

Store User Interface: **Miva Merchant CSSUI**

## Installation


1. Log into your Miva Merchant Admin
2. Navigate to **Domain Settings > Modules**
3. Click the **Add Module** to add a new Module
4. Click **Upload** and upload **pdsalsobought.mvc**
5. Press the **Add** button
6. Navigate to **Modules > Add/Remove Modules**
7. Find the **Also Bought Products** module in the modules list and click the **Install** button
8. The **Also Bought Products** module is now installed!

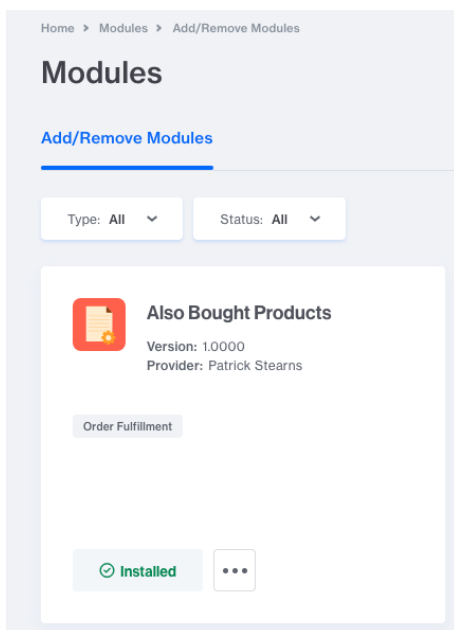

## Setting Up The pdsalsobought Item

By default, this item should be created when the module is installed. In the case you do not see the item **pdsalsobought** in your items list, follow the steps below:

1. Navigate to **User Interface**
2. Click on the **Items** tabs
3. Click the **Add Item** button to add a new item
4. Set the code to **pdsalsobought**
5. Set the module to **pdsalsobought**
6. Click the **Add** button

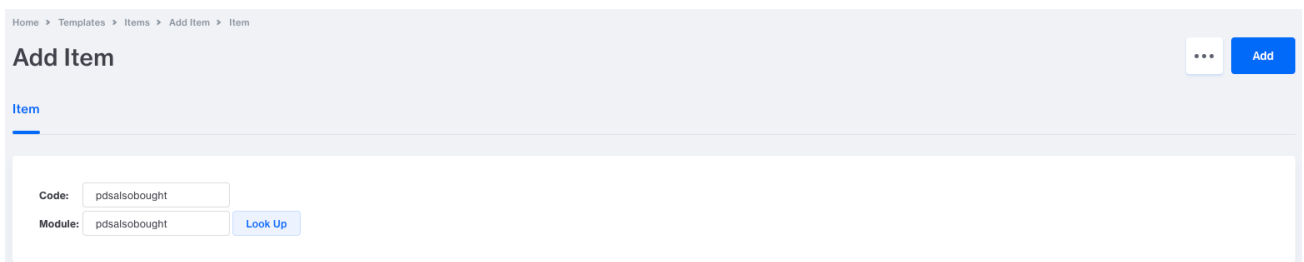

Home > Templates > Items > Add Item > Item

### Add Item

Item


Code:

Module:  [Look Up](#)

You may now utilize the item on the pages you assign it to.

# Also Bought Products Batch List

After the module is installed, a new **Also Bought Products** tab is available when editing a product in the Miva admin.

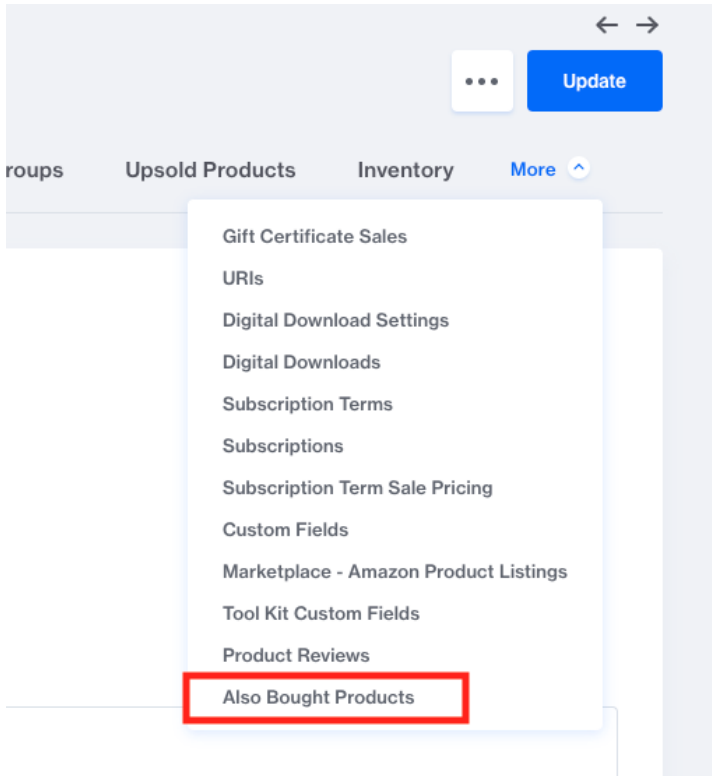

Clicking on the **Also Bought Products** tab link will take you to the also bought products batch list. The batch list allows you to view the current count and assignments for the also bought products. The filters and column displays function the same as the other batch lists found throughout the admin. Also bought products in the batch list may be assigned or unassigned by using the **ASSIGNED** column toggle. Unassigned also bought products will not be included in the product listing rendered by the `pdsal sobought` item.

Product	Images	Related Products	Attributes	Inventory Kit Builder	Inventory Variants	SEO	Categories	Price Groups	Upsold Products	Inventory	More
<input type="checkbox"/>	ASSIGNED	CODE	NAME		ALSO BOUGHT COUNT	COST	PRICE	TAXABLE	WEIGHT		+
<input type="checkbox"/>	<input checked="" type="checkbox"/>	heavy_prod	Heavy Product		15	0.00	500.00	Yes	1350.00		
<input type="checkbox"/>	<input checked="" type="checkbox"/>	variant_test	Variant Test Product		6	0.00	10.00	Yes	0.00		
<input type="checkbox"/>	<input checked="" type="checkbox"/>	AM13002	Auto Meter Edge Attitude Overhead ...		4	0.00	65.95	Yes	0.00		
<input type="checkbox"/>	<input checked="" type="checkbox"/>	attr_test_prod	Product With Attributes		2	0.00	5.00	Yes	0.00		
<input type="checkbox"/>	<input type="checkbox"/>	BGAAC202M-4_inch	Hinman Doublewide-4 inch		0	136.30	249.95	Yes	0.00		
<input type="checkbox"/>	<input type="checkbox"/>	BGAAC202M-2.5_inch	Hinman Doublewide-2.5 inch		0	121.95	199.95	Yes	10.00		

## Technical Set-up

To add also bought products to your page, you will need to do the following:

1. Navigate to **User Interface**
2. Click on the **Items** tab
3. Search for **pdsalsobought** and open the edit tab for that item.
4. Click on the **Pages** tab
5. Assign the item to the pages you would like to utilize the module.
  - a. For example, if you want to assign the item to the product page, assign the item to the **PROD** page code.

Once you have assigned the item to the desired pages, the **Also Bought Product List Layout** template and options will appear on the assigned pages. The option settings control the custom fields, image types, sorting options, pagination, and image dimensions that are rendered with the template.



The **Default Sort Method** defaults to the also bought product count in descending order for the current product. For example, the most frequently bought product will be sorted first in the list for the **Default** option.

### Also Bought Product List Layout ▾

```
1 Test:
2 <section class="o-layout">
3   <div class="o-layout__item">
4     <hr class="c-keyline">
5     <br>
6     <h4 class="c-heading-delta u-text-bold u-text-center u-text-uppercase">Customers Also Bought</h4>
7   </div>
8 </section>
9 <br>
10 <section class="o-layout u-grids-2 u-grids-3--l u-grids-4--xl x-product-list">
11   <smvt:foreach iterator="product" array="pdsalso Bought:products">
12     <div class="o-layout__item u-text-center x-product-list__item">
13       <a class="u-block x-product-list__link" href="{smvt:product:link}" title="{smvt:product:name}">
14         <figure class="x-product-list__figure">
15           
17             <strong class="x-product-list__name">{smvt:product:name}</strong>
18             <smvt:if expr="1.settings:product:base_price GT 1.settings:product:price">
```

**Custom Fields:**

Basket Inventory	Bin Number
Color	Maximum Quantity
Digital Download: Amazon CDN	Minimum Quantity
Digital Download: Amazon CDN	
Digital Download: Amazon CDN	
Digital Download: Amazon CDN	
Digital Download: Creation at P	
Digital Download: Delivery Met!	
Digital Download: Link Expiry	

Calculate Predicted Discounts

**Product Images:**  Main  Product Thumbnails

**Sorting Options:**  Off  On

**Default Sort Method:**  **WARNING:** Changing the default sorting option to any value other than "default" will increase page load times and increase the load on your server. Be fully aware of the effect this will have on your store before changing this option!

**Pagination:**  Reverse Default Display Order  Do not paginate products  Display  products per page

**Page Numbers:**  Do not show page count  Display  pages at a time

**Items Per Page Filter:**  Off  On

### Also Bought Product List Image Dimensions ▾

**Product Image:**  No constraints  Resize to fit within bounding box:  x  pixels

*Also Bought Product List Layout page section*



# Item Template

To render the **Also Bought Product List Layout** template, place the following code within a page template where the `pdsalsobought` item is assigned to the page:

```
<mvt:if expr="l.settings:pdsalsobought_product_count">  
  <mvt:item name="pdsalsobought" />  
</mvt:if>
```



The `l.settings:pdsalsobought_product_count` variable contains the number of also bought products assigned to the current product.

# JSON API

The following functions are available via the JSON API for the module.

Since these are module level functions, you'll need to use the following format to whitelist the functions:

```
Module:pdsalsobought:<Function Name>
```

Replace **<Function Name>** with the function names listed below.

## AlsoBoughtProductsList\_Load\_Query

This function is used to query also bought products for a given product. The product to query for may be specified using **Product\_ID**, **Product\_Code**, or **Product\_SKU**.



Only one of the product identifiers is required.

### Request Parameters

Key	Type	Description
Store_Code	String	Store code to run function against.
Function	String	This will always be the value <b>Module</b> .
Module_Code	String	This will always be the value <b>pdsalsobought</b> .
Module_Function	String	This will always be the value <b>AlsoBoughtProductsList_Load_Query</b> .
Product_Id	Number	Product id of the product to query.
Product_Code	String	Product code of the product to query.
Product_Sku	String	Product sku of the product to query.
Count	Number	Count is used to limit how many also bought products you want returned per request
Offset	Number	Used in conjunction with the <b>Count</b> parameter for paginating results of large datasets. Default is 0, which is no offset.
Sort	String	Field to sort results by. Available Sorting fields are <a href="#">listed below</a> . Use - prefix for a descending sort.
Filter	Object	Array of Objects containing search filters. See usage here: <a href="#">List Load Query Overview</a> . Available Search Filter fields are <a href="#">listed below</a> .
Assigned	Boolean	Filter product list results to only include assigned also bought products. Defaults to true if omitted.

Key	Type	Description
Unassigned	Boolean	Include unassigned also bought products in product list results. Defaults to false if omitted.

## On Demand Columns

descrip	Full HTML product description
catcount	Number of categories the product is assigned to
productinventorysettings	Product specific inventory settings
attributes	Includes attribute object in response
productimagedata	Product Image including Image Types and non-image types
categories	Product Category Assignments
productshippingrules	Includes product dimensions and restricted shipping methods (if any)
relatedproduct	Related product assignments
uris	Includes URI's object in response. Canonical URI is the default URL for the product.
CustomField_Values:*	See custom field usage here: <a href="https://docs.miva.com/json-api/list-load-query-overview">https://docs.miva.com/json-api/list-load-query-overview</a>
product_inventory	Includes 2 new fields for inventory counts as well as if inventory is active
page_code	Includes page_code field associated with product in response. Page_Code is used for alternate Product page templates.
cancat_code	Includes cancat_code field associated with product in response. cancat_code is the canonical category code for the product.

## Search Filter Columns

<b>id</b>	<b>code</b>	<b>sku</b>
<b>name</b>	<b>thumbnail</b>	<b>image</b>
<b>price</b>	<b>cost</b>	<b>descrip</b>
<b>weight</b>	<b>taxable</b>	<b>active</b>
<b>page_title</b>	<b>dt_created</b>	<b>dt_updated</b>
<b>cancat_code</b>	<b>page_code</b>	<b>alsobought_count</b>
<b>category</b> Supports only <b>IN</b> and <b>NOT_IN</b> operators. Accepts a comma separated list of category codes. Limits results to products in the specified categories.	<b>product_inventory</b> Searches the product's inventory level (not accounting for baskets)	

## Sort Filter Columns

One of these values would be passed in the sort request parameter to have the results sorted by that column. Value may be preceded by - for a descending sort.

<b>id</b>	<b>code</b>	<b>sku</b>
<b>name</b>	<b>thumbnail</b>	<b>image</b>
<b>price</b>	<b>cost</b>	<b>descrip</b>
<b>weight</b>	<b>taxable</b>	<b>active</b>
<b>page_title</b>	<b>dt_created</b>	<b>dt_updated</b>
<b>cancat_code</b>	<b>page_code</b>	<b>alsobought_count</b>

## Example Request

```
{
  "Store_Code": "PS",
  "Function": "Module",
  "Module_Code": "pdsalsobought",
  "Module_Function": "AlsoBoughtProductsList_Load_Query",
  "Product_Code": "prod1"
}
```

## Example Response

```
{
  "success": 1,
  "data": {
    "total_count": 1,
    "start_offset": 0,
    "data": [
      {
        "id": 158130,
        "code": "heavy_prod",
        "sku": "",
        "name": "Heavy Product",
        "thumbnail": "",
        "image": "",
        "price": 500.00,
        "formatted_price": "$500.00",
        "cost": 0.00,
        "formatted_cost": "$0.00",
        "weight": 1350.00,
        "taxable": true,
        "active": true,
        "page_title": "",
        "dt_created": 1508189047,
        "dt_updated": 1618693596,
        "page_code": "ALT_P_TEST",
        "canecat_code": "",
        "product_inventory_active": true,
        "product_inventory": 100,
        "assigned": true,
        "alsobought_count": 12
      }
    ]
  }
}
```

## AlsoBoughtProduct\_Update\_Assigned

This function allows you to assign or unassign an also bought product.

The product to target may be identified using **Product\_ID**, **Product\_Code**, or **Product\_SKU**.

The also bought product to target may be identified using **AlsoBoughtProduct\_ID**, **AlsoBoughtProduct\_Code**, or **AlsoBoughtProduct\_SKU**.



Only one of the product identifiers and one of the also bought product identifiers are required.

### Request Parameters

Key	Type	Description
Store_Code	String	Store code to run function against.
Function	String	This will always be the value <b>Module</b> .
Module_Code	String	This will always be the value <b>pdsalsobought</b> .
Module_Function	String	This will always be the value <b>AlsoBoughtProduct_Update_Assigned</b> .
Product_ID	Number	Target product id.
Product_Code	String	Target product code.
Product_SKU	String	Target product sku.
AlsoBoughtProduct_ID	Number	Target also bought product id.
AlsoBoughtProduct_Code	String	Target also bought product code.
AlsoBoughtProduct_SKU	String	Target also bought product sku.
Assigned	Boolean	Pass <b>true</b> to assign also bought product. Pass <b>false</b> to unassign also bought product.

## Example Request

```
{
  "Store_Code": "PS",
  "Function": "Module",
  "Module_Code": "pdsalsobought",
  "Module_Function": "AlsoBoughtProduct_Update_Assigned",
  "Product_Code": "prod1",
  "AlsoBoughtProduct_Code": "heavy_prod",
  "Assigned": true
}
```

## Example Response

```
{
  "success": 1
}
```



## AlsoBoughtProducts\_ProcessOrders

This function is used to update the also bought counts for products by processing the order items from a list of orders.

### Request Parameters

Key	Type	Description
Store_Code	String	Store code to run function against.
Function	String	This will always be the value <code>Module</code> .
Module_Code	String	This will always be the value <code>pdsalsobought</code> .
Module_Function	String	This will always be the value <code>AlsoBoughtProducts_ProcessOrders</code> .
Order_IDs	Array	Array of order ids to be processed.

### Example Request

```
{
  "Store_Code": "PS",
  "Function": "Module",
  "Module_Code": "pdsalsobought",
  "Module_Function": "AlsoBoughtProducts_ProcessOrders",
  "Order_IDs": [
    97268,
    97267
  ]
}
```

### Example Response

```
{
  "success": 1,
  "processed": 2
}
```

## XML Provisioning

The following XML Provisioning tags are available for use with Miva's **Data Management** import with the **Import Data and Settings in XML Provisioning Format** option.

```
<Module code="pdsalsobought" feature="fulfill">
  <!-- Unassign an also bought product from a product -->
  <AlsoBoughtProduct_Unassign product_code="prod1" alsoboughtproduct_code="prod2" />

  <!-- Assign an also bought product to a product -->
  <AlsoBoughtProduct_Assign product_code="prod1" alsoboughtproduct_code="prod2" />


  <!-- Process orders to update the also bought counts -->
  <AlsoBoughtProducts_ProcessOrder order_id="97265" />
  <AlsoBoughtProducts_ProcessOrder order_id="98124" />
</Module>
```

# Uninstalling the Module

To uninstall the module, you will need to make sure that the `pdsal sobought` item is fully removed.

Once the item is removed:

1. Navigate to **Modules > Add/Remove Modules**
2. Find the **Also Bought Products** module
3. Click the **...** button and click **Uninstall**

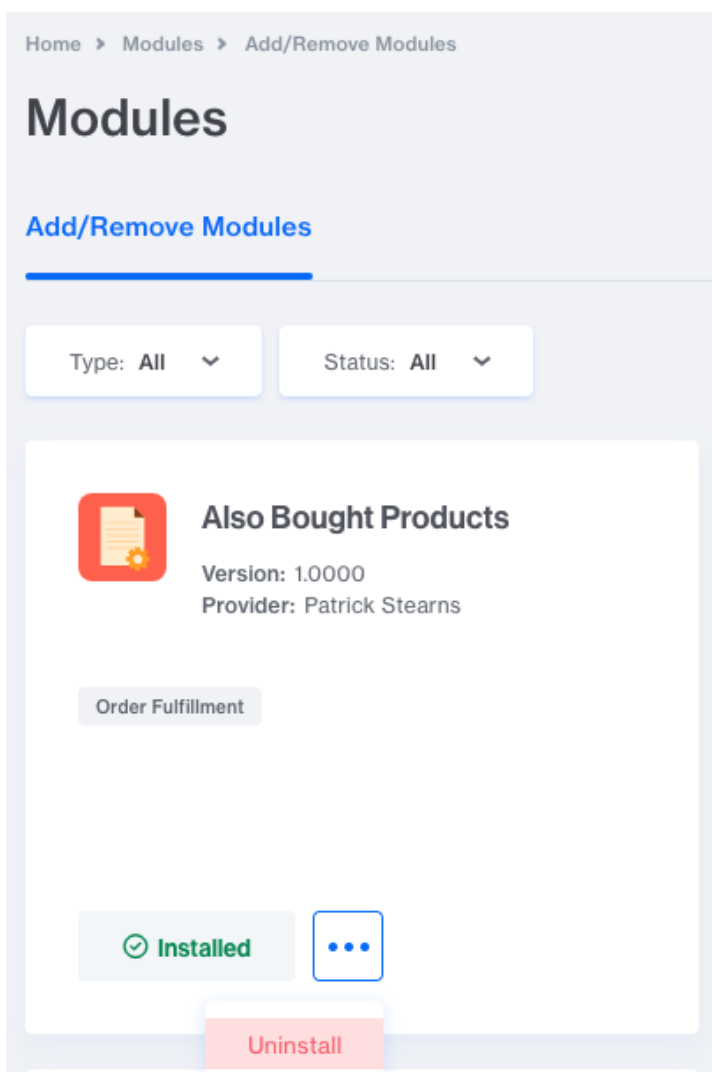

The module will remove all of the also bought products data once uninstalled.